

扬州三菱电子有限公司  
规格书

客户 \_\_\_\_\_

型号           **MDS60B**          

地址：江苏省扬州市南通西路 6 号

电话：0514-87344294

传真：0514-87310017

E— mail: SL you and me @ 163.com

<http://www.YZSLDZ.com>

# MDS60B 技术资料




$V_{RSM}$ (V)	$V_{RRM}$ (V)	$I_O$ (AV) =60A (sin 180° Tc=100°C)
900	800	MDS60B-8
1300	1200	MDS60B-12
1500	1400	MDS60B-14
1700	1600	MDS60B-16
1900	1800	MDS60B-18
2100	2000	MDS60B-20
2500	2400	MDS60B-24

## 特点:

- 金属化三氧化二铝陶瓷绝缘,传热性好。
- 高温焊料焊接,有利于可靠性。

## 典型应用:

- 变频器
- 开关电源
- 电焊机

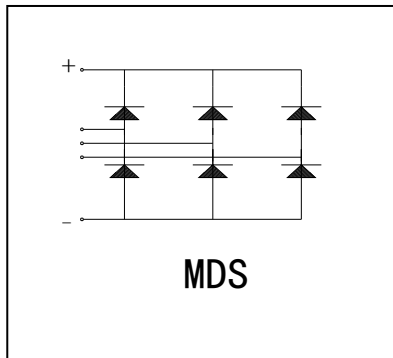

符号	测试条件	数值	单位
$I_O$ (AV)	Tc=100°C, 三相全波	60	A
$I_{FSM}$	Ta=25°C, 10ms, 0.6V <sub>RRM</sub>	500	A
$I^2t$	Ta=25°C, 10ms	0.005 × 500 <sup>2</sup>	A <sup>2</sup> S
$V_{FM}$	I <sub>FM</sub> =60A, Ta=25°C	1.10	V
$V_{F0}$	Tj=150°C	0.82	V
$r_F$	Tj=150°C	7.8	mΩ
$I_{R1}$	Ta=25°C, V <sub>R</sub> = V <sub>RSM</sub>	20	μA
$I_{R2}$	Ta=150°C, V <sub>R</sub> = V <sub>RRM</sub>	2	mA
R <sub>jc</sub>		0.25	°C/W
R <sub>cs</sub>		0.07	°C/W
T <sub>stg</sub>		-40~+150	°C
Viso	Ac,50HZ,正弦波,1min	2500	V
Ms	散热器安装力矩	3	N•m
Mt	电极端子安装力矩	3	N•m

